

ALUNIT

Excellent behaviour against fire, smoke and toxicity
- a strong solution for trains, ships and custom interior

Dansk Dekor-Laminat A/S

Dansk Dekor-Laminat A/S is a company in the Elektro-Isola group. The group has produced and distributed high-pressure laminates since 1922.

As a result of our close contact with the market and our own control of the entire production processes, the specific customer requirements are transformed quickly and effectively into new and improved processes and products.

We look for challenges – as a specialized company, we are flexible and eager to help our customers. If our standard products do not meet your requirements, please do not hesitate to call us and ask for an expert opinion.


Dansk Dekor-Laminat A/S invests continuously in new technology, which ensures both sufficient capacity and high quality.



Dansk Dekor - Laminat A/S
Grønlandsvej 197 · DK-7100 Vejle
Tlf. +45 7642 8282 · Fax. +45 75 82 71 21
dd@dandekor.dk · www.dandekor.dk

 Dansk Dekor-Laminat A/S

ALUNIT – the strong combination of decorative high-pressure laminate and aluminium

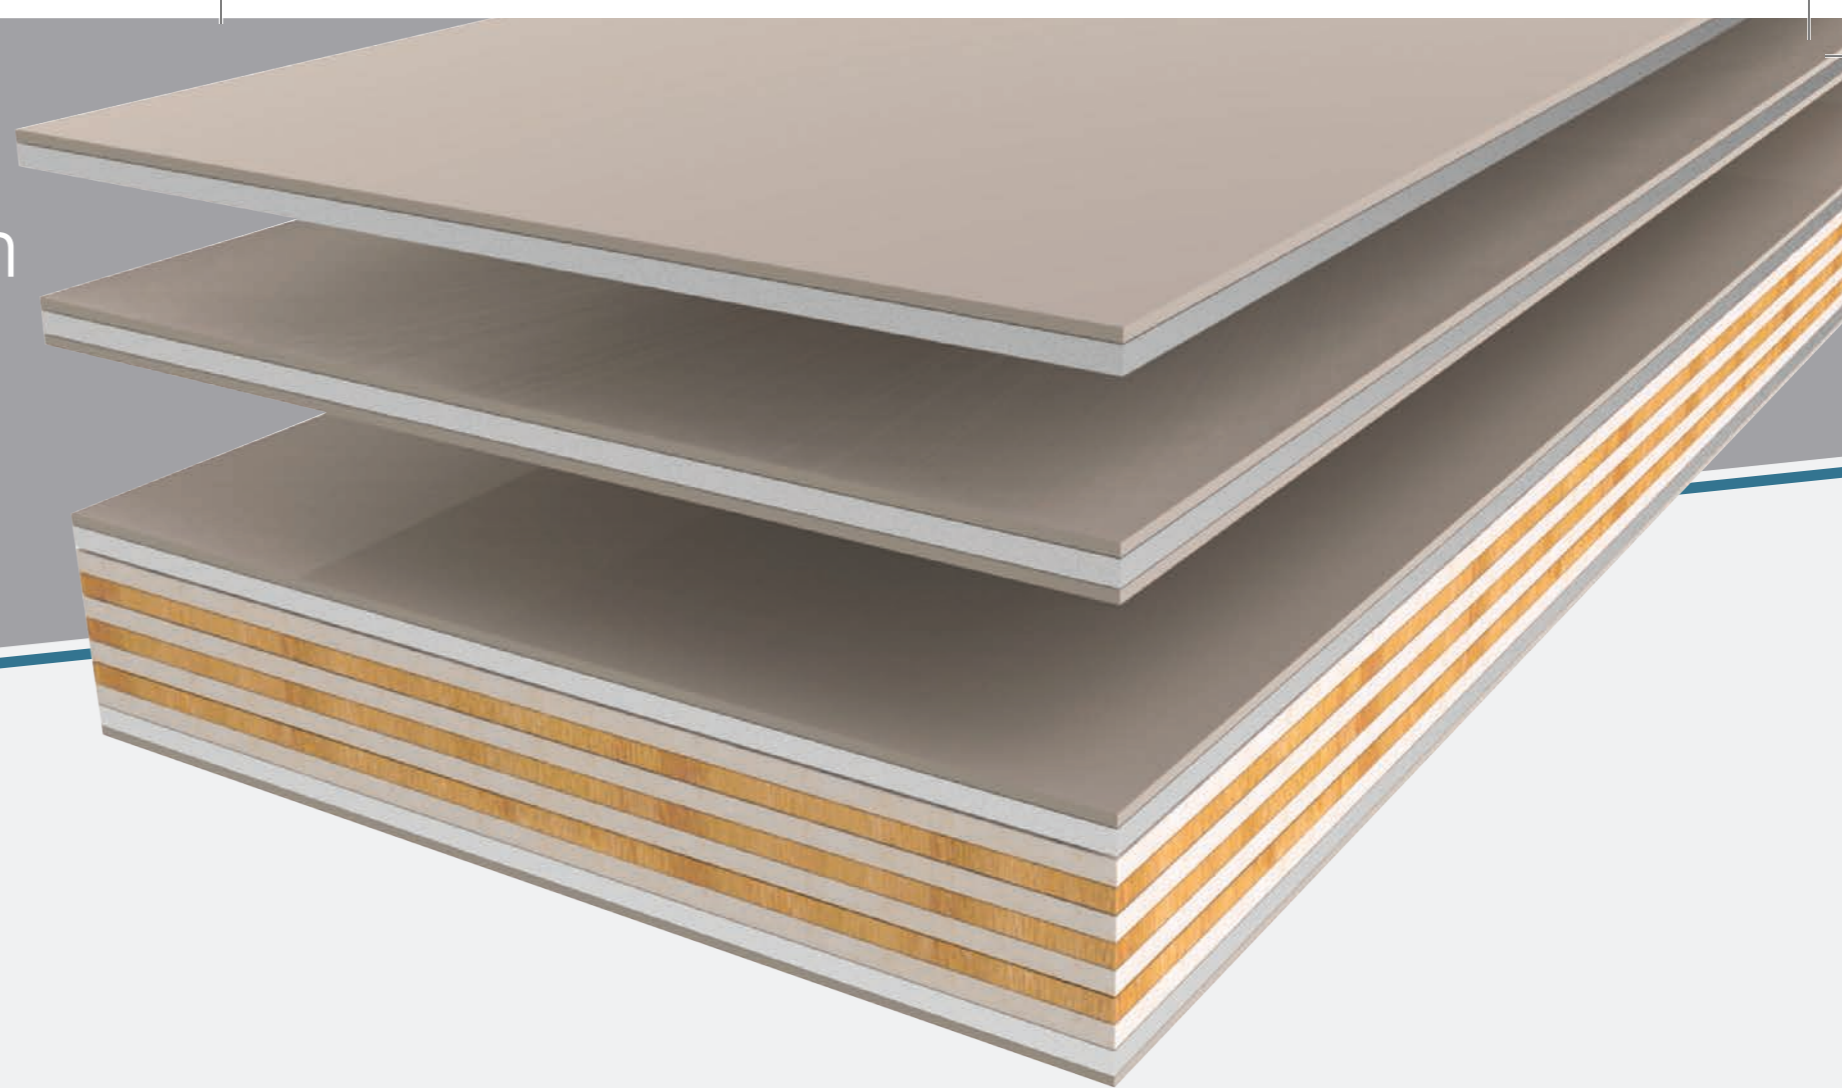

Alunit combines excellent fire safety performance, low weight and design possibilities while keeping all the benefits of high pressure laminates.

ALUNIT applications

- Walls
- Ceilings
- Composite constructions
- Elevators
- Various arch constructions – where extra safety is required



Claddings

ALUNIT advantage

- Excellent fire safety performance
- Low weight
- High strength and rigidity
- Attractive colours and designs
- Maintenance free surface



Balanced panels

Dansk Dekor-Laminat A/S is certified according to DS/EN ISO 9001 standard and DS/EN ISO 14001

Please visit our website:
www.dandekor.dk to see the full collection.



Interior panels

1: ALUNIT PANELS

Asymmetric construction

1,6 mm alunit panels are the best in aesthetics with total performance and functionality of high-pressure laminate. Alunit panels are used for gluing tasks such as bonding on countertops, furniture panels ect.

Profiles for joint and corners can be supplied, if needed.

2: ALUNIT PANELS

Balanced construction

2,1 mm alunit panels are commonly used as wall solutions in trains and ships where low weight, and safety goes hand in hand with a numerous design possibilities of the high-pressure laminate.

3: ALUNIT INTERIOR PANELS

Symmetric construction

≤ 30 mm panels, consist of alunit panels bonded on a wood-based core material.

Alunit interior panels are a suitable material for the manufacture of furniture and interior where fire safety is required.

Standard sizes	Aluminium	Backside
1250 x 2100 x 1,1 mm	0,5 mm	Aluminium
1250 x 2450 x 1,1 mm	0,5 mm	Aluminium
1250 x 2100 x 1,6 mm	0,5 mm	Sanded
1250 x 2100 x 1,6 mm	1,0 mm	Aluminium
1250 x 2450 x 1,6 mm	0,5 mm	Sanded
1250 x 3050 x 1,6 mm	1,0 mm	Aluminium
1250 x 2100 x 2,1 mm	1,0 mm	Sanded
1250 x 2450 x 2,1 mm	1,0 mm	Sanded

ALUNIT APPROVED BY:
CEN/TS 45 545-2:2009 - R1, HL2

I.M.O. certificated

